

4JB1

GRADE IDENTIFICATION

SERIES OF NOTCHES LOCATED AT SIDE OF GASKET

NOTCHES: 1 = 1.50 mm
 2 = 1.55 mm
 3 = 1.60 mm

GRADE SELECTION

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED


SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES BELOW

PROTRUSION	GRADE
0.758mm to 0.813mm	1
0.813mm to 0.859mm	2
0.859mm to 0.914mm	3

GRADES AVAILABLE FROM ACNZL

GRADE 1 1.50mm **BR990**

NOTCHES

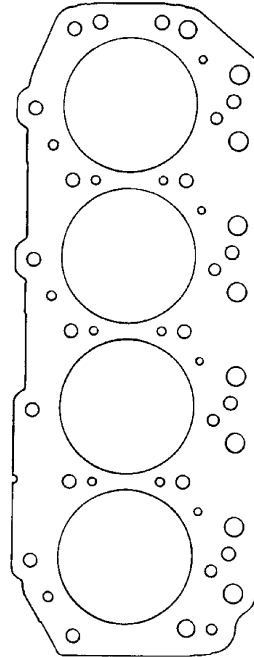

4JG2-T

GRADE IDENTIFICATION

SERIES OF HOLES LOCATED AT SIDE OF GASKET

NOTCHES: 1 = 1.60 mm
 2 = 1.65 mm
 3 = 1.70 mm

GRADE SELECTION

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES BELOW

PROTRUSION	GRADE
0.658mm to 0.713mm	1
0.713mm to 0.759mm	2
0.759mm to 0.814mm	3

GRADES AVAILABLE FROM ACNZL

GRADE 3 = 1.70mm **AA5770**

HOLES

