

CD20

GRADE IDENTIFICATION

SERIES OF NOTCHES LOCATED AT SIDE OF GASKET

NOTCHES: 1 = 1.15 mm
2 = 1.20 mm
3 = 1.25 mm

GRADE SELECTION

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORGINALLY INSTALLED.

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.


PROTRUSION	GRADE
LESS THAN 0.505mm	1
0.505mm to 0.555mm	2
MORE THAN 0.555mm	3

GRADES AVAILABLE FROM ACNZL

CD20 FROM ENGINE NUMBER CD20111-714

GRADE 3 **BW420**

NOTCHES

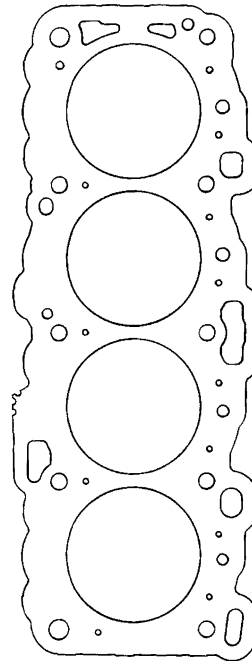

LD20 & LD20-T

GRADE IDENTIFICATION

SERIES OF HOLES LOCATED AT SIDE OF GASKET

HOLES: 1 = 1.15 mm
2 = 1.20 mm
3 = 1.25 mm

GRADE SELECTION

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORGINALLY INSTALLED.

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.

PROTRUSION	GRADE
LESS THAN 0.505mm	1
0.505mm to 0.555mm	2
MORE THAN 0.555mm	3

GRADES AVAILABLE FROM ACNZL

GRADE 3 **BR360**

NOTCHES

