

LD28

GRADE IDENTIFICATION

SERIES OF NOTCHES LOCATED AT SIDE OF GASKET

NOTCHES: 1 = 1.12 mm
2 = 1.20 mm
3 = 1.28 mm

GRADE SELECTION


WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED.

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.

| PROTRUSION | GRADE |
|--------------------|-------|
| LESS THAN 0.487mm | 1 |
| 0.487mm to 0.573mm | 2 |
| MORE THAN 0.573mm | 3 |

GRADES AVAILABLE FROM ACNZL

| | |
|---------|--------------|
| GRADE 2 | BK080 |
|---------|--------------|

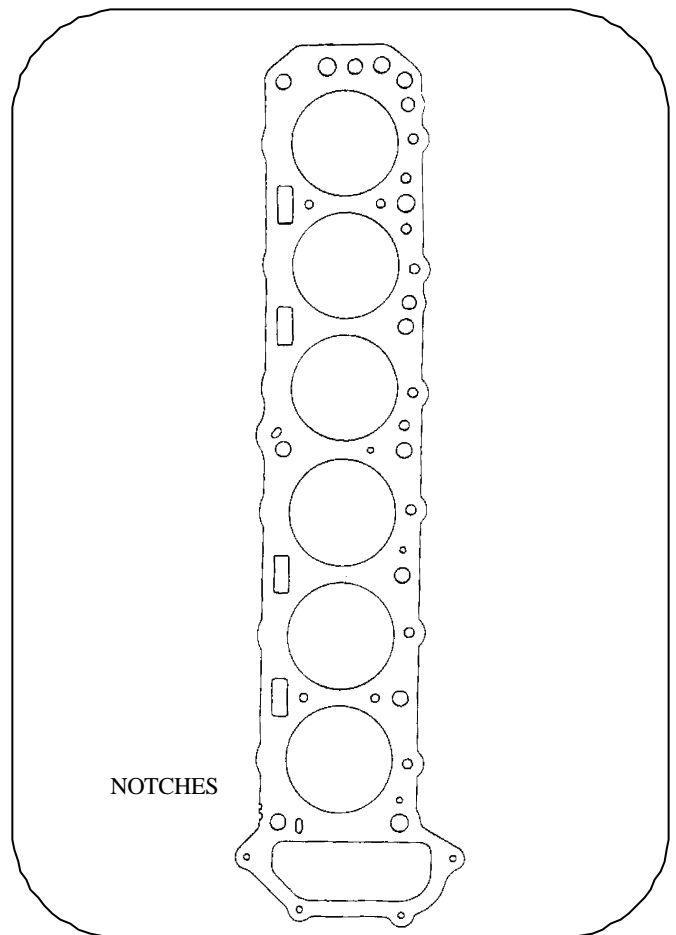

RD28

GRADE IDENTIFICATION

SERIES OF NOTCHES LOCATED AT REAR OF GASKET

NOTCHES: 1 = 1.15 mm
2 = 1.20 mm
3 = 1.25 mm

GRADE SELECTION

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED.

SELECT CORRECT GRADE ACCORDING TO NISSAN PISTON PROTRUSION VALUES.

| PROTRUSION | GRADE |
|-------------------|-------|
| LESS THAN 0.49mm | 1 |
| 0.49mm to 0.575mm | 2 |
| MORE THAN 0.575mm | 3 |

GRADES AVAILABLE FROM ACNZL

| | |
|---------|--------------|
| GRADE 1 | BW620 |
| GRADE 2 | BW621 |
| GRADE 3 | BW622 |

