

2L & 2L-T

GRADE IDENTIFICATION

GRADE NOTCHES LOCATED AT REAR OF GASKET

GRADE SELECTION

6 GRADES USED AT FACTORY (A TO F). 3 GRADES USED IN AFTERMARKET APPLICATIONS B, D & F.

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED OR USE THE VALUES BELOW:


SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.

PROTRUSION	GRADE
0.68mm to 0.77mm	B
0.78mm to 0.87mm	D
0.88mm to 0.97mm	F

GRADES AVAILABLE FROM ACNZL

GRADE B = 1.45mm	BW800MT
GRADE D = 1.55mm	BW801MT
GRADE F = 1.65mm	BW802MT

GRADE NOTCHES

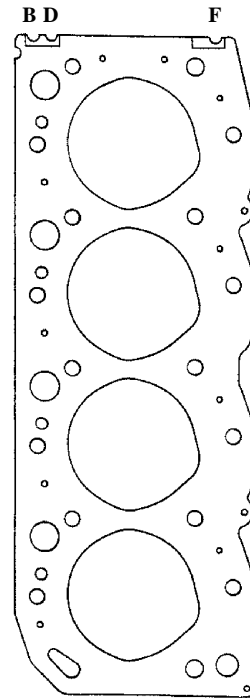

3L

GRADE IDENTIFICATION

GRADE NOTCHES LOCATED AT REAR OF GASKET

GRADE SELECTION

6 GRADES USED AT FACTORY (A TO F). 3 GRADES USED IN AFTERMARKET APPLICATIONS B, D & F.

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED OR USE THE VALUES BELOW:

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.

PROTRUSION	GRADE
0.68mm to 0.77mm	B
0.78mm to 0.87mm	D
0.88mm to 0.97mm	F

GRADES AVAILABLE FROM ACNZL

GRADE B = 1.45mm	BW950MT
GRADE D = 1.55mm	BW951MT
GRADE F = 1.65mm	BW952MT

GRADE NOTCHES

