

TD23

GRADE IDENTIFICATION

GRADE MARKINGS LOCATED ON SIDE OF GASKET

GRADE: 1 = 1.30 mm
 2 = 1.35 mm
 3 = 1.40 mm

GRADE SELECTION


WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED.

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.

PROTRUSION	GRADE
LESS THAN 0.118mm	1
0.118mm to 0.168mm	2
MORE THAN 0.168mm	3

GRADES AVAILABLE FROM ACNZL

GRADE 3 ONLY AVAILABLE IN SET **DS760**

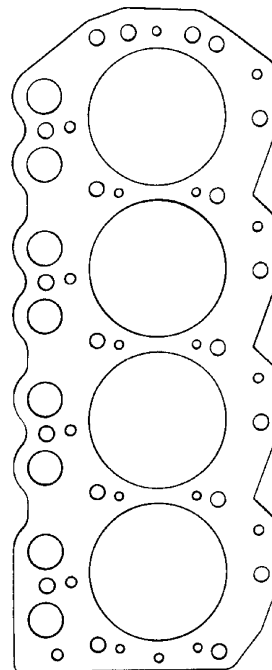

TD25

GRADE IDENTIFICATION

GRADE MARKINGS LOCATED ON SIDE OF GASKET

HOLES: 1 = 1.15 mm
 2 = 1.20 mm
 3 = 1.25 mm

GRADE SELECTION

WHEN REPLACING HEAD GASKETS ONLY USE SAME GRADE AS ORIGINALLY INSTALLED.

SELECT CORRECT GRADE ACCORDING TO PISTON PROTRUSION VALUES.

PROTRUSION	GRADE
LESS THAN 0.118mm	1
0.118mm to 0.168mm	2
MORE THAN 0.168mm	3

GRADES AVAILABLE FROM ACNZL

GRADE 3 ONLY AVAILABLE IN SET **DW540**

